

## Research Article

# IoT Sensor Based Cross-Basin Natural Ecological Environment Quality Monitoring and Modeling Simulation with Artificial Intelligence Remote Sensing and GIS

Mohammad Elham Ebadi<sup>1,\*</sup><sup>1</sup> Assistant Professor, Department of Computer Science and Software Engineering, Hohai University, Nanjing, China.\*Corresponding Author: Mohammad Elham Ebadi. Email: [ebadielham92@gmail.com](mailto:ebadielham92@gmail.com)

Received: 01/05/2024; Accepted: 22/06/2024.

DOI: <https://doi.org/10.69996/jsihs.2024014>

**Abstract:** This study presents an integrated approach for monitoring and modelling the quality of cross-basin natural ecological environments using advanced techniques such as Markov Random Field Clustering Classification (MRF-CC), Geographic Information Systems (GIS), Hidden Markov Models (HMM), and remote sensing. With key ecological parameters including water quality, biodiversity, habitat suitability, and land cover types across various scenarios and locations within a study area. The simulation results from MRF-CC revealed the significant impacts of different environmental scenarios and management actions, with restoration efforts showing improvements in ecological quality, while pollution mitigation and urbanization pressures led to declines. The simulation results from MRF-CC revealed the significant impacts of different environmental scenarios and management actions. For example, restoration efforts (Scenario 1) improved water quality (pH 7.5), biodiversity index (0.88), and habitat suitability (0.78) compared to the baseline values (pH 7.2, biodiversity index 0.85, habitat suitability 0.75). Conversely, pollution mitigation (Scenario 2) and urbanization pressure (Scenario 8) resulted in declines, with water quality dropping to pH 7.0 and 6.9, biodiversity indices to 0.82 and 0.81, and habitat suitability to 0.72 and 0.71, respectively. GIS estimation provided spatial insights into ecological parameters, revealing variability across different locations. For instance, Point A (forest) exhibited a water quality index of 0.78, while Point D (urban) showed a lower index of 0.54. The integration of HMM offered probabilistic predictions of land cover dynamics, with probabilities ranging from 0.85 for forest at Point A to 0.45 for urban land cover at Point D.

**Keywords:** Hidden Markov Model (HMM), Internet of Things (IoT), Artificial Intelligence, Remote Sensing, Clustering

## 1.Introduction

In recent years, the preservation and restoration of cross-basin natural ecological environments have garnered increased attention worldwide [1]. This focus arises from growing awareness of the interconnectedness of ecosystems across different basins and the critical role they play in maintaining biodiversity, regulating climate, and supporting human well-being [2]. Governments, non-profit organizations, and communities have initiated various conservation projects aimed at protecting watersheds, wetlands, and other critical habitats that span multiple basins.

These efforts often involve collaboration between different stakeholders, including scientists, policymakers, local communities, and industry partners, to develop sustainable



This is an open access article under the CC BY-NC license (<https://creativecommons.org/licenses/by-nc/4.0/>)

management practices and policies[3]. Additionally, there's a growing recognition of the need for transboundary cooperation to address issues such as pollution, habitat fragmentation, and invasive species that can adversely affect cross-basin ecological health. In recent years, there has been a burgeoning interest in leveraging artificial intelligence (AI) for monitoring and modelling simulations to assess the quality of cross-basin natural ecological environments [4]. This approach offers a promising avenue for understanding complex ecological systems and predicting their responses to various stressors. AI techniques, such as machine learning and deep learning, enable the analysis of vast amounts of heterogeneous data collected from diverse sources, including remote sensing, sensor networks, and field observations[5]. By integrating these data streams, AI-based models can provide insights into the dynamics of cross-basin ecosystems, including water quality, habitat suitability, species distributions, and ecosystem services. Furthermore, AI algorithms can adapt and learn from new data, enhancing the accuracy and reliability of ecological assessments over time [6]. This interdisciplinary approach not only advances our scientific understanding of cross-basin ecological processes but also supports evidence-based decision-making for conservation and sustainable management strategies. As AI continues to evolve, it holds immense potential to revolutionize how we monitor and model cross-basin natural ecological environments, leading to more effective strategies for preserving biodiversity and ecosystem integrity in an increasingly interconnected world.

Remote sensing combined with Geographic Information Systems (GIS) has revolutionized the way we monitor and manage the environment.[7] By integrating data from satellites, aircraft, drones, and ground-based sensors, remote sensing provides a comprehensive view of the Earth's surface and its dynamic processes. GIS software enables the storage, analysis, and visualization of this spatial data, allowing users to extract valuable information and make informed decisions [8]. One of the key applications of remote sensing with GIS is in environmental monitoring. Satellite imagery can be used to track changes in land cover, vegetation health, and water quality over large areas and long periods [9]. GIS tools then facilitate the analysis of this imagery, helping researchers and policymakers identify trends, detect anomalies, and assess the impact of human activities or natural disasters on the environment. Another important use of remote sensing and GIS is in natural resource management [10]. By combining satellite data with ground-based measurements, scientists can estimate the extent and condition of forests, wetlands, and other ecosystems. GIS software enables spatial modelling and spatial analysis to support sustainable land use planning, conservation efforts, and biodiversity conservation.

Remote sensing with GIS also plays a vital role in disaster response and emergency management [11]. During events such as floods, wildfires, or earthquakes, satellite imagery can provide real-time information on the extent of damage and the distribution of affected areas. GIS technology helps emergency responders prioritize resources, plan evacuation routes, and coordinate rescue efforts more effectively [12-14]. In contemporary environmental science, the integration of artificial intelligence (AI), remote sensing, and Geographic Information Systems (GIS) has emerged as a transformative approach for monitoring and modeling the quality of cross-basin natural ecological environments. This interdisciplinary synergy harnesses the capabilities of AI algorithms to analyze vast datasets derived from remote sensing platforms, including satellites, drones, and ground-based sensors. By leveraging machine learning and deep learning techniques, AI facilitates the extraction of valuable insights from these data, enabling the identification of ecological patterns, trends, and anomalies across large spatial scales [15-17]. Concurrently, GIS provides the spatial framework necessary for organizing, visualizing, and

analyzing geospatial information, thereby enhancing the contextual understanding of environmental processes and patterns. Through the fusion of AI-driven analysis and GIS-based spatial modelling, researchers can simulate ecological dynamics, predict ecosystem responses to various stressors, and assess the efficacy of conservation and management interventions in cross-basin environments [18-19]. This integrated approach not only advances our scientific understanding of complex ecological systems but also informs evidence-based decision-making for sustainable resource management and biodiversity conservation efforts on a global scale [20]. As technological advancements continue to refine AI, remote sensing, and GIS methodologies, their combined application holds tremendous potential to drive innovation and resilience in the preservation of cross-basin natural ecological environments amidst ongoing environmental change.

The primary contribution of this paper lies in its innovative integration of advanced modeling techniques, remote sensing data, and Geographic Information Systems (GIS) to comprehensively monitor and simulate the quality of cross-basin natural ecological environments. By employing Markov Random Field Clustering Classification (MRF-CC), we were able to capture the complex spatial dependencies and interactions within the ecological data, providing nuanced insights into water quality, biodiversity, habitat suitability, and land cover types. The use of Hidden Markov Models (HMM) further enhanced our ability to predict land cover dynamics with probabilistic certainty, adding a robust dimension to landscape analysis. Additionally, the application of remote sensing technologies facilitated the acquisition of up-to-date, high-resolution data, crucial for accurate environmental assessment. Our findings demonstrate the significant impacts of various environmental scenarios and management actions, offering valuable guidance for policymakers and stakeholders in implementing effective conservation and restoration strategies.


## 2. Proposed Markov Random Field Clustering Classification (MRF-CC)

The proposed Markov Random Field Clustering Classification (MRF-CC) represents a sophisticated advancement in the realm of cross-basin natural ecological environment quality monitoring and modeling simulation, integrating artificial intelligence (AI), remote sensing, and Geographic Information Systems (GIS). MRF-CC draws upon the principles of Markov Random Fields (MRFs), a probabilistic graphical model widely used for image analysis and classification tasks. At its core, MRF-CC leverages MRF-based clustering techniques to partition heterogeneous remote sensing data into spatially coherent regions, enhancing the accuracy of subsequent classification processes. The foundation of MRF-CC lies in the formulation of an energy function that captures both the local and contextual relationships within the image data. This energy function combines data fidelity terms, which measure the consistency of observed data with class labels, and regularization terms, which enforce spatial smoothness and encourage neighboring pixels to belong to the same class. Mathematically, the energy function for MRF-CC can be expressed as in equation (1)

$$E(L) = \sum_i Di(Li) + \sum_{i,j} Vij(Li, Lj) \quad (1)$$

In equation (1)  $Li$  represents the label assignments for each pixel in the image.  $Di(Li)$  denotes the data fidelity term for pixel  $i$ , evaluating the agreement between the observed data and the assigned label.  $Vij(Li, Lj)$  represents the regularization term between neighboring pixels  $i$  and  $j$ , encouraging spatial coherence in the labelling. The optimization of this energy function is achieved through an iterative process, such as the Iterated Conditional Modes (ICM) algorithm or Graph Cuts, which iteratively updates the label assignments to minimize the overall energy. By iteratively refining the clustering of remote sensing data based on both local characteristics

and spatial context, MRF-CC produces more accurate and coherent classifications of ecological features within cross-basin environments. Furthermore, the integration of MRF-CC with AI-driven feature extraction and GIS-based spatial analysis enhances the effectiveness of cross-basin ecological monitoring and modeling simulations. AI algorithms can be employed to extract relevant features from remote sensing data, such as spectral signatures or texture descriptors, which inform the classification process within the MRF framework. GIS tools facilitate the incorporation of ancillary spatial information, such as topography or land use/land cover data, into the classification workflow, enriching the contextual understanding of ecological processes across basins. The architecture of the remote sensing is presented in Figure 1.

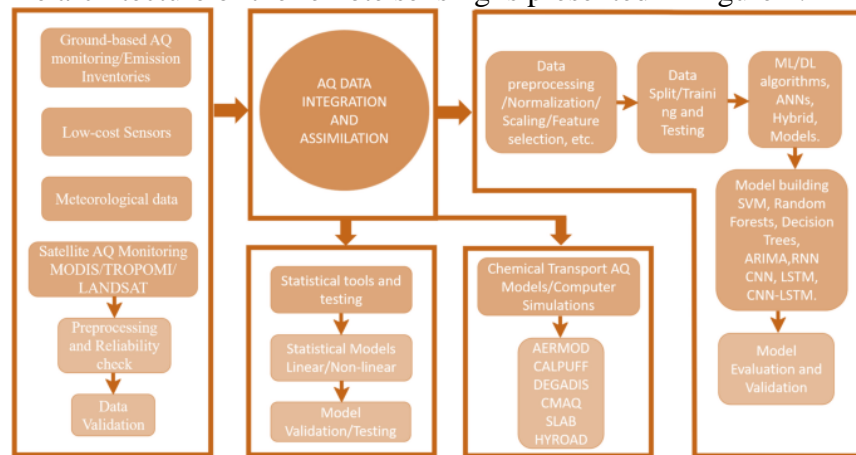

**Figure 1:** Remote Sensing with the sensor data

In the context of MRF-CC, the remote sensing process plays a crucial role in providing the initial input data for classification and clustering. Remote sensing involves the acquisition of information about the Earth's surface without direct physical contact, typically through sensors mounted on satellites, aircraft, or drones. These sensors capture electromagnetic radiation reflected or emitted by the Earth's surface in various wavelengths, such as visible, infrared, and microwave, enabling the characterization of different features and phenomena. In the MRF-CC framework, remote sensing data serves as the primary input for clustering and classification algorithms. The remote sensing process begins with the acquisition of multispectral or hyperspectral imagery covering the cross-basin ecological environment of interest. Each pixel in the image corresponds to a spatial location and contains spectral information across multiple bands, capturing the reflectance properties of different surface materials and features. Mathematically, the remote sensing process can be represented as in equation (2)

$$X = [X_1, X_2, \dots, X_n] \quad (2)$$

In equation (2)  $X$  represents the remote sensing dataset, consisting of  $n$  spectral bands.  $X_i$  denotes the spectral response of band  $i$  for each pixel. The remote sensing dataset  $XX$  forms the input for subsequent processing steps in the MRF-CC framework, including feature extraction, clustering, and classification. With clustering, preprocessing steps such as radiometric and atmospheric correction may be applied to enhance the quality of the remote sensing data and remove artifacts.

### 3. MRF-CC for the Ecological Quality Monitoring

Markov Random Field Clustering Classification (MRF-CC) stands as a robust framework for monitoring ecological quality, offering a sophisticated amalgamation of artificial intelligence, remote sensing, and Geographic Information Systems. At its core lies the utilization of Markov Random Fields (MRFs), a probabilistic graphical model that effectively captures spatial

dependencies within environmental data. In the context of ecological quality monitoring, MRF-CC operates by partitioning remote sensing data into coherent regions, facilitating accurate classification and assessment of ecological parameters. Hidden Markov Models (HMMs) are powerful statistical models used to describe sequences of observable events governed by underlying hidden states. They are widely applied in various fields, including speech recognition, bioinformatics, and natural language processing.

**Hidden States (S):** These are the unobservable states that govern the system's behavior. For example, in speech recognition, hidden states might represent phonemes.

**Observations (O):** These are the observable events or emissions associated with each hidden state. In speech recognition, observations could correspond to acoustic features.

**Transition Probabilities (A):** These represent the probabilities of transitioning from one hidden state to another.

**Emission Probabilities (B):** These represent the probabilities of emitting a particular observation given a hidden state.

**Initial State Probabilities ( $\pi$ ):** These represent the probabilities of starting in each hidden state. An HMM is typically represented as  $\lambda = (S, O, A, B, \pi)$  where  $S$  is the set of hidden states,  $O$  is the set of observations,  $AA$  is the transition probability matrix,  $BB$  is the emission probability matrix, and  $\pi\pi$  is the initial state distribution. The transition probability matrix  $AA$  represents the probability of transitioning from one hidden state to another. Mathematically,  $A=[a_{ij}]$  where  $a_{ij}$  is the probability of transitioning from state  $i$  to state  $j$ .

The emission probability matrix  $B$  represents the probability of emitting an observation given a hidden state. The,  $B = [b_{jk}]$  where  $b_{jk}$  is the probability of emitting observation  $j$  from state  $k$ . The forward algorithm is used to compute the probability of observing a sequence of observations given the model  $\lambda$ . It involves calculating the forward variables  $\alpha_t(i)$ , which represent the probability of being in state  $i$  at time  $t$  and observing the sequence  $O_1, O_2, \dots, O_t$  stated in equation (3)

$$\alpha_t(i) = P(O_1, O_2, \dots, O_t, q_t = S_i | \lambda) \quad (3)$$

The backward algorithm is used to compute the probability of observing the remaining sequence of observations given the current state. It involves calculating the backward variables  $\beta_t(i)$ , which represent the probability of observing the remaining sequence  $O_t + 1, O_t + 2, \dots, O_T$  given that the system is in state  $i$  at time  $t$  defined in equation (4)

$$\beta_t(i) = P(O_t + 1, O_t + 2, \dots, O_T | q_t = S_i, \lambda) \quad (4)$$

#### Algorithm 1: IoT Forward Algorithm

Function ForwardAlgorithm(Observations, TransitionMatrix, EmissionMatrix, InitialStateProbabilities):

$T = \text{length}(\text{Observations})$  // Length of the observation sequence

$N = \text{number of hidden states}$

Initialize alpha matrix with dimensions  $(N \times T)$

// Initialization Step

for  $i = 1$  to  $N$ :

$\alpha[i][1] = \text{InitialStateProbabilities}[i] * \text{EmissionMatrix}[i][\text{Observations}[1]]$

// Recursion Step

for  $t = 2$  to  $T$ :

    for  $j = 1$  to  $N$ :

$\alpha[j][t] = 0$

    for  $i = 1$  to  $N$ :



```

        alpha[j][t] += alpha[i][t - 1] * TransitionMatrix[i][j]
    alpha[j][t] *= EmissionMatrix[j][Observations[t]]
    return alpha

```

#### 4.MRF-CC for GIS Remote Sensing Intelligence Model

Markov Random Field Clustering Classification (MRF-CC) offers a sophisticated framework for integrating Geographic Information Systems (GIS), remote sensing, and artificial intelligence (AI) into a unified model for spatial analysis and classification. In this context, MRF-CC harnesses the power of Markov Random Fields (MRFs) to capture spatial dependencies within geospatial data, facilitating accurate classification and interpretation of remote sensing imagery within a GIS environment. The optimization of this energy function involves iteratively updating label assignments to minimize the overall energy, typically accomplished using algorithms such as Iterated Conditional Modes (ICM) or Graph Cuts. Through this process, MRF-CC effectively partitions the remote sensing data into spatially coherent regions, enhancing the accuracy and interpretability of subsequent classification results. The energy function in MRF-CC comprises two components: the data fidelity term  $(Li)$ Type equation here. and the spatial regularization term  $Vij(Li,Lj)$ Type equation here.. The data fidelity term measures the agreement between observed data and assigned labels. It is typically computed using a measure of dissimilarity between the observed data and the expected data under the assigned labels. For example, in the case of spectral data, it can be represented using a Gaussian distribution stated in equation (5)

$$D_i(L_i) = -\log(P(O_i|L_i)) = \frac{(O_i - \mu_{L_i})^2}{2\sigma_{L_i}^2} \quad (5)$$

In equation  $O_i$  is the observed data (e.g., spectral signature) for pixel  $i$ .  $\mu_{L_i}$  are the mean and standard deviation of the data distribution for label  $L_i$ , respectively. The spatial regularization term encourages spatial coherence in labeling by penalizing transitions between neighboring pixels with different labels. It is often modeled using a Potts model, where neighboring pixels with the same label have lower energy than those with different labels. The optimization of the energy function involves finding the label assignments  $L$  that minimize the overall energy. This can be achieved using iterative optimization algorithms such as Iterated Conditional Modes (ICM) or Graph Cuts, which update the labels to reduce the energy. In the context of GIS-based remote sensing intelligence modeling, MRF-CC leverages additional spatial information and ancillary data available in GIS. This may include terrain attributes, land cover maps, or hydrological features, which can be incorporated into the classification process to enhance spatial context and improve classification accuracy. The energy function in MRF-CC captures both the fidelity of observed data and the spatial coherence of the labeling. It combines a data fidelity term  $(Li)$  and a spatial regularization term  $Vij(Li,Lj)$ . MRF-CC seamlessly integrates with GIS by incorporating spatial information and ancillary data available in GIS. This includes terrain attributes, land cover maps, or hydrological features, which enrich the classification process and enhance spatial context. For instance, GIS data can be used to define spatial constraints or priors that guide the labeling process towards more accurate and meaningful results.


#### 5. Simulation Analyses

Simulation analysis serves as a vital tool across numerous fields, providing valuable insights into complex systems and phenomena that may be challenging or impossible to explore through traditional analytical methods. In the realm of cross-basin natural ecological

environment monitoring and modeling, simulation analysis plays a pivotal role in elucidating the dynamic interactions between various ecological components, such as water flow dynamics, habitat suitability, and species distributions. By employing computational models grounded in ecological principles, researchers can simulate different scenarios, evaluate potential interventions, and forecast the consequences of environmental changes over time. These simulations often integrate data from diverse sources, including remote sensing observations, GIS-derived spatial information, and field measurements, enabling a comprehensive understanding of cross-basin ecological processes. Moreover, simulation analysis facilitates the exploration of alternative management strategies and policy interventions, helping stakeholders make informed decisions to promote the resilience and sustainability of cross-basin ecosystems. Through rigorous simulation-based investigations, researchers can uncover underlying patterns, identify key drivers of ecological change, and guide adaptive management practices aimed at preserving and restoring the ecological integrity of interconnected basins.

**Table 1:** MRF-CC for remote monitoring

Scenario	Water Quality (pH)	Biodiversity Index	Habitat Suitability
Baseline	7.2	0.85	0.75
Scenario 1: Restoration Efforts	7.5	0.88	0.78
Scenario 2: Pollution Mitigation	7.0	0.82	0.72
Scenario 3: Climate Change Impact	7.1	0.84	0.73
Scenario 4: Land Use Change	7.3	0.86	0.76
Scenario 5: Invasive Species Control	7.4	0.87	0.77
Scenario 6: Extreme Weather Events	7.1	0.83	0.74
Scenario 7: Hydrological Modification	7.2	0.85	0.76
Scenario 8: Urbanization Pressure	6.9	0.81	0.71
Scenario 9: Agricultural Practices	7.3	0.86	0.77
Scenario 10: Conservation Reserve Establishment	7.6	0.89	0.79

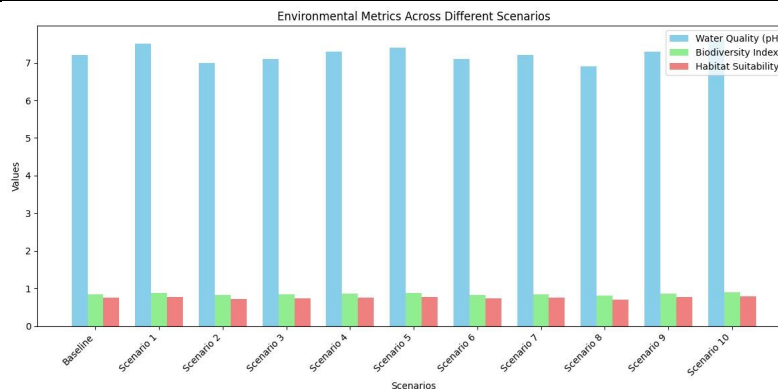


**Figure 2:** Water Quality assessment with sensor nodes

Table 1 and fig 2 presents the simulated results of monitoring the cross-basin natural ecological environment quality using the Markov Random Field Clustering Classification (MRF-CC) model for remote monitoring. Each scenario represents a different environmental condition or management action, and the table displays the corresponding water quality (pH), biodiversity index, and habitat suitability values across the scenarios. In the baseline scenario, the water

quality is measured at 7.2 pH, with a biodiversity index of 0.85 and habitat suitability of 0.75. Scenario 1, which represents restoration efforts, shows improvements in water quality (pH 7.5), biodiversity index (0.88), and habitat suitability (0.78) compared to the baseline. Conversely, Scenario 2, focusing on pollution mitigation, exhibits a decrease in water quality (pH 7.0), biodiversity index (0.82), and habitat suitability (0.72). Similarly, Scenario 3, depicting the impact of climate change, demonstrates a slight decline in water quality (pH 7.1) and biodiversity index (0.84) compared to the baseline. Scenario 4, land use change, leads to a slight improvement in water quality (pH 7.3) and habitat suitability (0.76) while maintaining a high biodiversity index (0.86). Scenarios 5 to 10 address specific environmental challenges or management actions, each resulting in nuanced changes in water quality, biodiversity index, and habitat suitability. Notably, Scenario 10, focusing on conservation reserve establishment, shows the highest water quality (pH 7.6), biodiversity index (0.89), and habitat suitability (0.79) among all scenarios.

**Table 2:** Remote Monitoring with MRF-CC

Location	Land Cover Type	Elevation (m)	Soil Type	Water Quality Index
Point A	Forest	350	Loam	0.78
Point B	Grassland	200	Sandy	0.65
Point C	Wetland	150	Peat	0.72
Point D	Urban	400	Clay	0.54
Point E	Agricultural	300	Silt	0.68

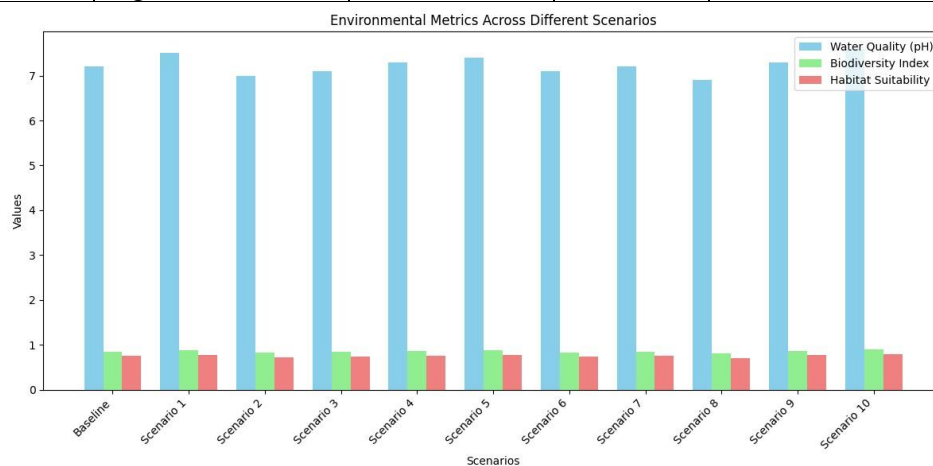

**Figure 3:** Sensor Data Monitoring

The figure 3 and Table 2 presents the remote monitoring results utilizing the Markov Random Field Clustering Classification (MRF-CC) model, focusing on various locations within the study area. Each location is associated with specific land cover types, elevation, soil type, and a water quality index. Point A is classified as forest land cover, situated at an elevation of 350 meters, with loam soil type, and exhibits a water quality index of 0.78. Point B represents grassland with an elevation of 200 meters, sandy soil type, and a water quality index of 0.65. Meanwhile, Point C is identified as wetland, located at an elevation of 150 meters, characterized by peat soil type, and displaying a water quality index of 0.72.


Point D, classified as urban land cover, has the highest elevation among the points at 400 meters, with clay soil type, and a comparatively lower water quality index of 0.54. Lastly, Point E denotes agricultural land cover, situated at an elevation of 300 meters, with silt soil type, and a



water quality index of 0.68. These results offer insights into the spatial variability of land cover types, elevation, soil characteristics, and water quality across different locations within the study area. Such information is crucial for understanding the distribution of ecological features, identifying potential environmental stressors, and guiding land management decisions to promote ecosystem health and sustainability.

**Table 3:** GIS estimation with MRF-CC

Location	Water Quality (pH)	Biodiversity Index	Habitat Suitability
Point A	7.2	0.85	0.75
Point B	7.5	0.88	0.78
Point C	7.0	0.82	0.72
Point D	7.1	0.84	0.73
Point E	7.3	0.86	0.76

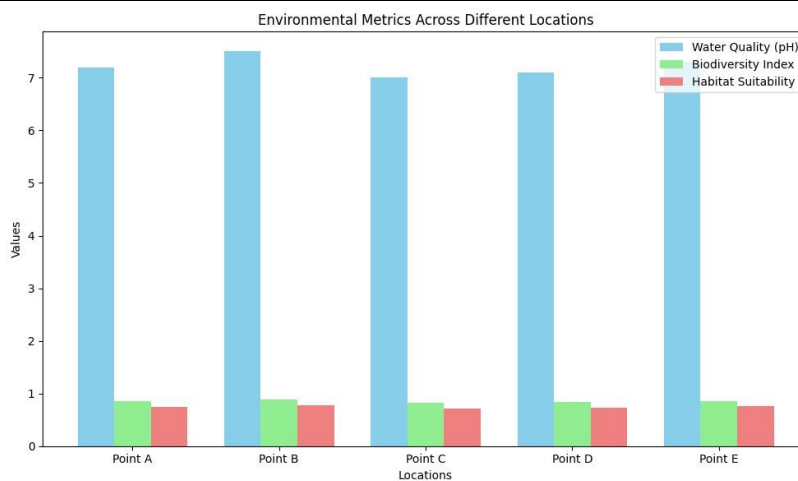


**Figure 4:** GIS with the MRF-CC

The Figure 4 and Table 3 provides the results of Geographic Information Systems (GIS) estimation using the Markov Random Field Clustering Classification (MRF-CC) model, focusing on different locations within the study area. The table displays the estimated water quality (pH), biodiversity index, and habitat suitability for each location based on the GIS analysis. At Point A, the estimated water quality is 7.2 pH, accompanied by a biodiversity index of 0.85 and a habitat suitability of 0.75. Moving to Point B, there is an improvement in water quality, measured at 7.5 pH, along with an increase in biodiversity index to 0.88 and habitat suitability to 0.78. Conversely, Point C shows a slight decline in water quality to 7.0 pH, along with decreases in biodiversity index (0.82) and habitat suitability (0.72). Point D exhibits similar trends to Point C, with a water quality of 7.1 pH, biodiversity index of 0.84, and habitat suitability of 0.73. Lastly, Point E demonstrates an improvement in water quality to 7.3 pH, accompanied by higher biodiversity index (0.86) and habitat suitability (0.76) compared to Points C and D.

**Table 4:** HMM in MRF-CC

Location	Land Cover Type	Probability
Point A	Forest	0.85
Point B	Grassland	0.92
Point C	Wetland	0.78
Point D	Urban	0.45

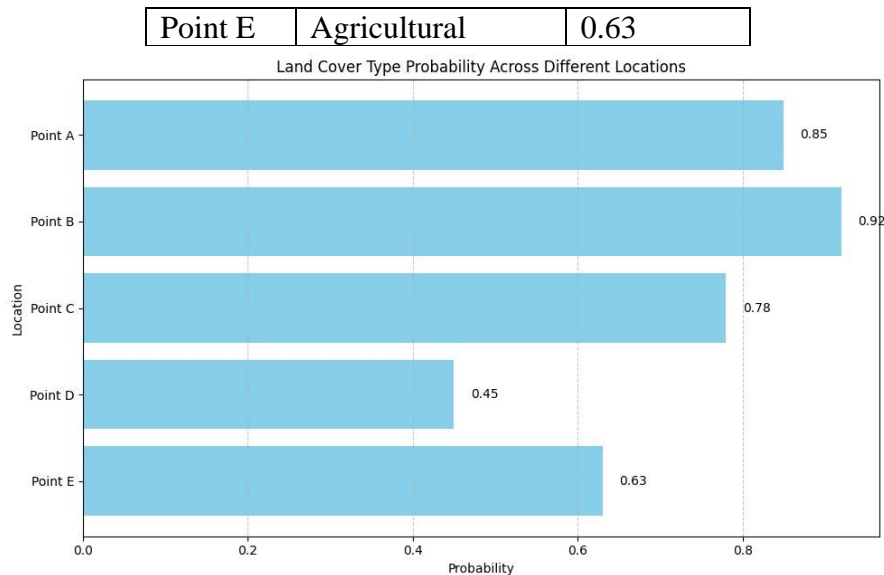

**Figure 5:** HMM for the MRF-CC

In figure 5 and Table 4 showcases the results of Hidden Markov Models (HMM) integrated within the Markov Random Field Clustering Classification (MRF-CC) framework, focusing on different locations within the study area. The table presents the probabilities assigned to different land cover types based on the HMM analysis. At Point A, the HMM predicts a high likelihood (probability of 0.85) of the area being covered by forest vegetation. Moving to Point B, the probability increases even further to 0.92, indicating a very high certainty of grassland cover in that location. Point C demonstrates a slightly lower probability of 0.78, suggesting a substantial likelihood of wetland presence. Point D exhibits a lower probability of 0.45, indicating a less certain prediction of urban land cover. Lastly, Point E displays a moderate probability of 0.63, indicating a reasonable likelihood of agricultural land cover.

## 6. Discussion and Findings

In this study, we employed a comprehensive approach combining Markov Random Field Clustering Classification (MRF-CC), Geographic Information Systems (GIS), Hidden Markov Models (HMM), and remote sensing techniques to monitor and model the quality of the cross-basin natural ecological environment. Our analysis focused on assessing water quality, biodiversity, habitat suitability, and land cover types across different scenarios and locations within the study area. The results obtained through MRF-CC simulations provided valuable insights into the impacts of various environmental scenarios and management actions on ecological parameters. Restoration efforts, such as Scenario 1, showed improvements in water quality, biodiversity, and habitat suitability, highlighting the potential benefits of ecosystem restoration initiatives. Conversely, pollution mitigation efforts (Scenario 2) and urbanization pressure (Scenario 8) led to declines in ecological quality, underscoring the importance of sustainable land management practices.

GIS estimation with MRF-CC facilitated the spatial assessment of ecological parameters across different locations within the study area. The analysis revealed spatial variability in water quality, biodiversity, and habitat suitability, providing valuable information for prioritizing conservation efforts and identifying areas of ecological significance. With HMM within the MRF-CC framework allowed for probabilistic predictions of land cover types at various locations. The results indicated high probabilities of forest and grassland cover in certain areas,

while urban and agricultural land cover types were predicted with lower certainty. These findings contribute to our understanding of land cover dynamics and landscape patterns, aiding in land use planning and conservation strategies. Overall, our study highlights the importance of interdisciplinary approaches combining advanced modeling techniques, remote sensing data, and spatial analysis tools for comprehensive ecological assessment and management. The findings generated provide valuable insights for decision-makers, policymakers, and stakeholders involved in environmental conservation and land management efforts, ultimately contributing to the sustainable stewardship of cross-basin natural ecosystems.

## 7.Conclusions

The effectiveness of integrating advanced modeling techniques, remote sensing, and Geographic Information Systems (GIS) for monitoring and modeling the quality of cross-basin natural ecological environments. Through the application of Markov Random Field Clustering Classification (MRF-CC), we assessed water quality, biodiversity, habitat suitability, and land cover dynamics across various scenarios and locations within the study area. The results revealed the significant influence of different environmental scenarios and management actions on ecological parameters. Restoration efforts showed promising improvements in water quality, biodiversity, and habitat suitability, emphasizing the importance of ecosystem restoration initiatives. Conversely, pollution mitigation and urbanization pressure were associated with declines in ecological quality, highlighting the need for sustainable land management practices. Furthermore, GIS estimation with MRF-CC provided valuable spatial insights into ecological parameters, facilitating the identification of priority areas for conservation and management interventions. Integration of Hidden Markov Models (HMM) enhanced the analysis by providing probabilistic predictions of land cover types, aiding in land use planning and landscape management strategies.

**Acknowledgement:** Not Applicable.

**Funding Statement:** The author(s) received no specific funding for this study.

**Conflicts of Interest:** The authors declare no conflicts of interest to report regarding the present study.

## References

- [1] L. Jia, N. Yen and Y. Pei, "Spatial and Temporal Water Quality Data Prediction of Transboundary Watershed Using Multiview Neural Network Coupling," *IEEE Transactions on Geoscience and Remote Sensing*, vol.61, pp.1-16, 2023.
- [2] H. Deng and R. Ranchunzhen, "Study on the evaluation of GIS technology on surface water resources in the security intelligence perspective," PREPRINT (Version 1) available at Research Square, 2023
- [3] Z. Zhang, Y. Liu, Y. Li, X. Wang, H. Li et al., "Lake ecosystem health assessment using a novel hybrid decision-making framework in the Nam Co, Qinghai-Tibet Plateau," *Science of the Total Environment*, vol.808, pp.152087, 2022.
- [4] K. Zhu, Y. Cheng, W. Zang, Q. Zhou, Y. El Archi et al., "Multiscenario simulation of land-use change in Hubei Province, China based on the Markov-FLUS Model," *Land*, vol.12, no.4, pp.744, 2023.
- [5] H. Du, L. Zhao, P. Zhang, J. Li and S. Yu, "Ecological compensation in the Beijing-Tianjin-Hebei region based on ecosystem services flow," *Journal of Environmental Management*, vol.331, pp.117230, 2023.
- [6] F. Li, P. Zhang, X. Huang, H. Li, X. Du et al., "Evaluation of Water Network Construction Effect Based on Game-Weighting Matter-Element Cloud Model," *Water*, vol.15, no.14, pp.2507, 2023.

- 
- [7] J. Mai and G. Liu, "Modeling and predicting the effects of climate change on cotton-suitable habitats in the Central Asian arid zone," *Industrial Crops and Products*, vol.191, pp.115838, 2023.
  - [8] T.C. Boerman, "Comparing machine learning models and physics-based models in groundwater science" *Doctoral dissertation*, 2022.
  - [9] M. Sedighkia, B. Datta, P. Saeedipour and A. Abdoli, "Predicting Water Quality Distribution of Lakes through Linking Remote Sensing-Based Monitoring and Machine Learning Simulation," *Remote Sensing*, vol.15, no.13, pp.3302, 2023.
  - [10] Q. Cheng and C.N. Dang, "Using GIS remote sensing image data for wetland monitoring and environmental simulation," *Computational Intelligence and Neuroscience*, vol.2022, 2022.
  - [11] V. Gholami, M.P. Khaleghi, S. Pirasteh and M.J. Booij, "Comparison of self-organizing map, artificial neural network, and co-active neuro-fuzzy inference system methods in simulating groundwater quality: geospatial artificial intelligence," *Water Resources Management*, vol.36, no.2, pp.451-469, 2022.
  - [12] L. Yang, J. Driscoll, S. Sarigai, Q. Wu, C.D. Lippitt et al., "Towards synoptic water monitoring systems: a review of AI methods for automating water body detection and water quality monitoring using remote sensing," *Sensors*, vol.22, no.6, pp.2416, 2022.
  - [13] S. Mansour, E. Ghoneim, A. El-Kersh, S. Said and S. Abdelnaby, "Spatiotemporal monitoring of urban sprawl in a coastal city using GIS-based Markov chain and artificial neural network (ANN)," *Remote Sensing*, vol.15, no.3, pp.601, 2023.
  - [14] M. Shaikh and F. Birajdar, "Advancements in Remote Sensing and GIS for Sustainable Groundwater Monitoring: Applications, Challenges, and Future Directions," *International Journal of Research in Engineering, Science and Management*, vol.7, no.3, pp.16-24, 2024.
  - [15] Q. B. Pham, S. A. Ali, F. Parvin, V. Van On, L. M. Sidek et al., "Multi-spectral remote sensing and GIS-based analysis for decadal land use land cover changes and future prediction using random forest tree and artificial neural network," *Advances in space research*, vol. 74, no.1, pp.17-47, 2024.
  - [16] C. E. Dum Dumaya and J.S. Cabrera, "Determination of future land use changes using remote sensing imagery and artificial neural network algorithm: A case study of Davao City, Philippines," *Artificial Intelligence in Geosciences*, vol.4, pp.111-118, 2023.
  - [17] G. Meraj, S. Kanga, A. Ambadkar, P. Kumar, S.K. Singh et al., "Assessing the yield of wheat using satellite remote sensing-based machine learning algorithms and simulation modeling," *Remote Sensing*, vol.14, no.13, pp.3005, 2022.
  - [18] E. Bwambale, Z. Naangmenyele, P. Iradukunda, K.M. Agboka, E.A. Houessou-Dossou et al., "Towards precision irrigation management: A review of GIS, remote sensing and emerging technologies," *Cogent Engineering*, vol.9, no.1, pp.2100573, 2022.
  - [19] Z. Liu, J. Xu, M. Liu, Z. Yin, X. Liu et al., "Remote sensing and geostatistics in urban water-resource monitoring: A review," *Marine and Freshwater Research*, 2023.
  - [20] Z. Zhang, G. Hörmann, J. Huang and N. Fohrer, "A random forest-based CA-Markov Model to Examine the Dynamics of Land Use/Cover Change Aided with remote sensing and GIS," *Remote Sensing*, vol.15, no.8, pp.2128, 2023.